



20×20×6mm

DC Axial-Flow Fan

★ General Specification(一般规格)

☆ Material: Frame And Impeller: Thermal Plastic UL 94V-0

☆ Lead Wires: UL Type

RED Wire Positive(+)

BLACK Wire Negative(-)

☆ Insulation Resistance: 10MΩ Or Over With a DC250V Megger


☆ Dielectric Withstand Voltage: AC500V 1S

☆ Allowable Ambient Temperature Range:


-10°C~+70°C(Operation)

-40°C~+70°C(Storage)

★ Dimensions Drawing(外观图)

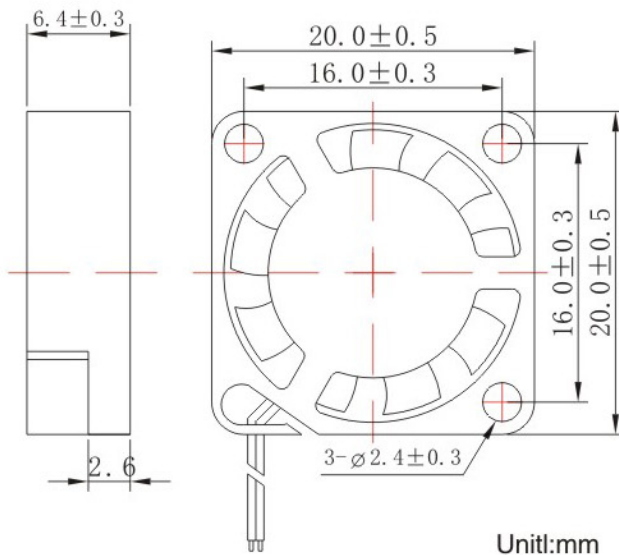

★ Characteristic Curves(特性曲线)

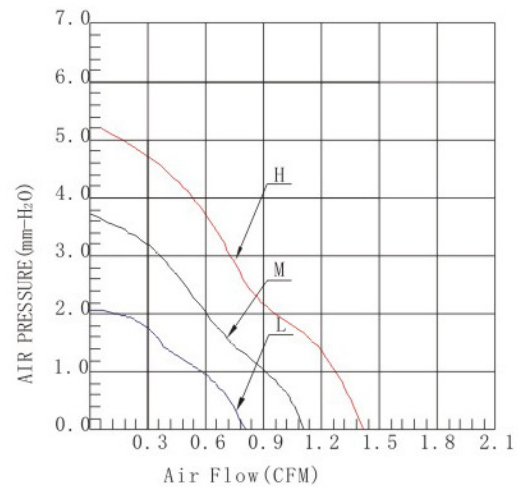

★ Specifications(规格)

Model (型号)	Bearing System (培林)	Rated Voltage (V) (电压)	Operation Voltage (V) (电压范围)	Current (A) (电流)	Input power (W) (功率)	Speed (RPM) (转速)	Air Flow (CFM) (风量)	Static Pressure (mm-H ₂ O) (静压)	Noise Level (dB-A) (噪音)	Weight (g) (重量)
YD052006HS	Sleeve	5	4.5~5.5	0.22	1.1	15000	1.41	5.22	33.65	4
YD052006MS				0.17	0.85	12000	1.02	3.69	26.87	4
YD052006LS				0.12	0.6	9000	0.77	2.02	20.34	4