




92×92×38mm

AC Axial-Flow Fan


★ General Specification(一般规格)

- ☆ Material: Impeller: Thermal Plastic UL 94V-0
Frame: Aluminium Alloy
- ☆ Lead Wires: UL Type
- ☆ Motor Protection: Impedance Protected
- ☆ Insulation Resistance: 10MΩ Or Over With a DC500V Megger
- ☆ Dielectric Strength: AC1500V 0.5mA 1S
- ☆ Allowable Ambient Temperature Range:
-10°C ~ +70°C (Operation)
-30°C ~ +85°C (Storage)

★ Dimensions Drawing(外观图)

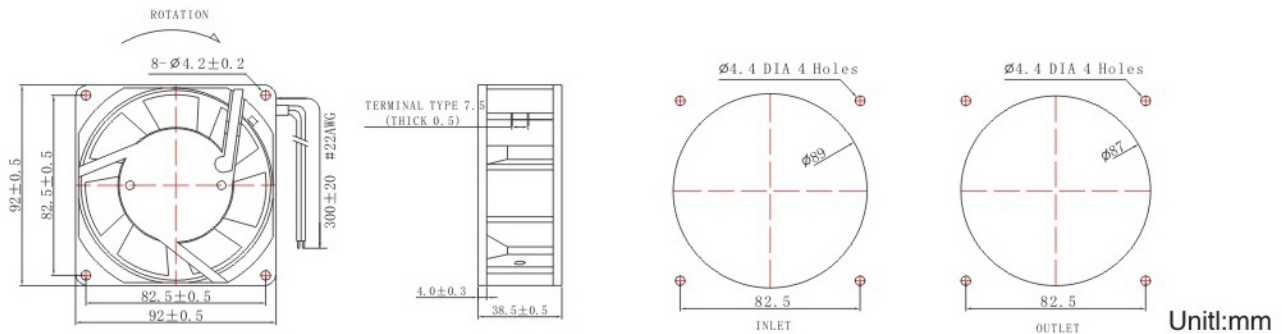

★ Characteristic Curves(特性曲线)

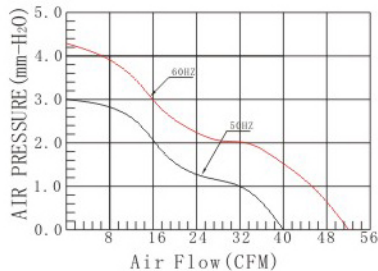

★ Specifications(规格)

Model (型号)	Bearing System (培林)	Rated Voltage (V) (电压)	Freq. (Hz) (频率)	Current (A) (电流)	Input power (W) (功率)	Speed (RPM) (转速)	Air Flow (CFM) (风量)	Static Pressure (mm-H ₂ O) (静压)	Noise Level (dB-A) (噪音)	Weight (g) (重量)
YA19238HSL	Sleeve	110	50/60	0.17/0.13	12.5/9	2100/2400	41/53	3.05/4.32	30/34	340
YA19238HBL	Ball	110	50/60	0.17/0.13	12.5/9	2150/2500	42/53	3.08/4.40	30/34	340
YA29238HSL	Sleeve	220	50/60	0.08/0.07	11.0/8.0	2000/2400	40/52	3.00/4.32	30/34	340
YA29238HBL	Ball	220	50/60	0.08/0.07	11.0/8.0	2000/2400	40/52	3.00/4.32	30/34	340